

## Cable to Ground Rod

### Mold Information:


- Molds listed are for stranded cable. For solid conductor, add suffix "S" after conductor number. i.e. 4S = 4 AWG solid conductor.
- Handles for "R" Price Key Molds DO NOT INCLUDE Flint Igniters.
- Price Key is the **Bold Letter** in the Mold Part No.
- For mold Wear Plates, add suffix "WP" to the end of the Mold Part No. See page 315 for details.

### Required Tools & Accessories:

- MH1 - Handle for "P" Price Key Molds
- MH2 - Handle for "Y" Price Key Molds
- MH3 - Handle for "R" Price Key Molds
- FLTIG - Flint Igniter when Price Key is "R"

### Recommended Tools & Accessories:

- CCBRSH1 - Cable Cleaning Brush
- MCBRSH1 - Mold Cleaning Brush

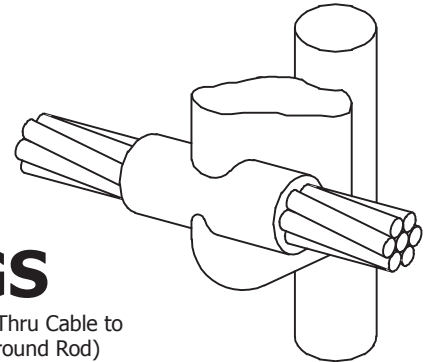

**GS**  
(Horizontal Thru Cable to Side of Ground Rod)



### GS Connection Type

Ground Rod Size	Cable Size	Mold Part No.	Weld Metal	
			UltraShot	NUWTUBE
1/2"	#6	GS-126R	US65	NUWTUBE65
	#4	GS-124R	US65	NUWTUBE65
	#2 Sol	GS-122SR	US65	NUWTUBE65
	#2	GS-122R	US65	NUWTUBE65
	1/0	GS-121/OP	US115	NUWTUBE115
	2/0	GS-122/OP	US115	NUWTUBE115
	3/0	GS-123/OP	US150	NUWTUBE150
	4/0	GS-124/OP	US150	NUWTUBE150
	250 MCM	GS-1225CMP	US150	NUWTUBE150
5/8"	#6	GS-586R	US65	NUWTUBE65
	#4	GS-584R	US65	NUWTUBE65
	#2 Sol	GS-582SR	US65	NUWTUBE65
	#2	GS-582R	US65	NUWTUBE65
	1/0	GS-581/OP	US115	NUWTUBE115
	2/0	GS-582/OP	US115	NUWTUBE115
	3/0	GS-583/OP	US150	NUWTUBE150
	4/0	GS-584/OP	US150	NUWTUBE150
	250 MCM	GS-5825CMP	US150	NUWTUBE150
500 MCM	GS-585CMY	US400	2-NUWTUBE200	

### GS Connection Type continued

Ground Rod Size	Cable Size	Mold Part No.	Weld Metal	
			UltraShot	NUWTUBE
3/4"	#6	GS-346R	US65	NUWTUBE65
	#4	GS-344R	US65	NUWTUBE65
	#2 Sol	GS-342SR	US65	NUWTUBE65
	#2	GS-342R	US65	NUWTUBE65
	1/0	GS-341/OP	US115	NUWTUBE115
	2/0	GS-342/OP	US115	NUWTUBE115
	3/0	GS-343/OP	US150	NUWTUBE150
	4/0	GS-344/OP	US150	NUWTUBE150
	250 MCM	GS-3425CMP	US200	NUWTUBE200
	500 MCM	GS-345CMY	US500	2-NUWTUBE250

### NOTES:

- Molds listed are for copper-clad steel ground rods.
- For welding to full size stainless steel, galvanized steel or solid copper ground rods, add letter "F" to ground rod size. For sectional ground rods, add letter "S" to ground rod size. See chart on page 326 for details.