

Technical Data Sheet

August 2013
For Worldwide Use

267- 750- PN

1:1 Ratio

Use with Q-Seal 295 1500ml Ratio Packs



FEATURES AND BENEFITS

- | | |
|--------------------------------|---------------------------|
| • Portable | • No Cleaning |
| • Forward and Reverse Control | • Disposable Static Mixer |
| • Viscosities up to 20,000 cps | • Continuous Output |
| • Increased Productivity | • Easy Operation |

Product Description

This dual cartridge air operated gun is for use with 1500 ml ratio packs. The 267-750-PN gun dispenses at a 1:1 Ratio. The amount of material dispensed can be controlled by the trigger. There is a forward and reverse switch which makes for convenient and easy operation. The built in air regulator located at the bottom of the handle allows the user to control the air pressure supplied to the gun. Products are easily mixed and dispensed. A convenient interchangeable handle is located at the side of the gun for left or right holding options.

An optional gas operated air compressor is available for convenient portability.


Specifications

Mixing Ratio	1:1
Viscosity Range:	Up to 20,000 cps
Dimensions: L x W	9-3/16" x 6-1/2" (23.34 cm x 16.51 cm)
Weight:	8.5 lbs (3.86 kg)
Air Requirements	Clean, Dry Compressed Air at 90psi and 4+ CFM

Options

Air Compressor	11cfm @ 90psi
----------------	---------------

267-750-PN

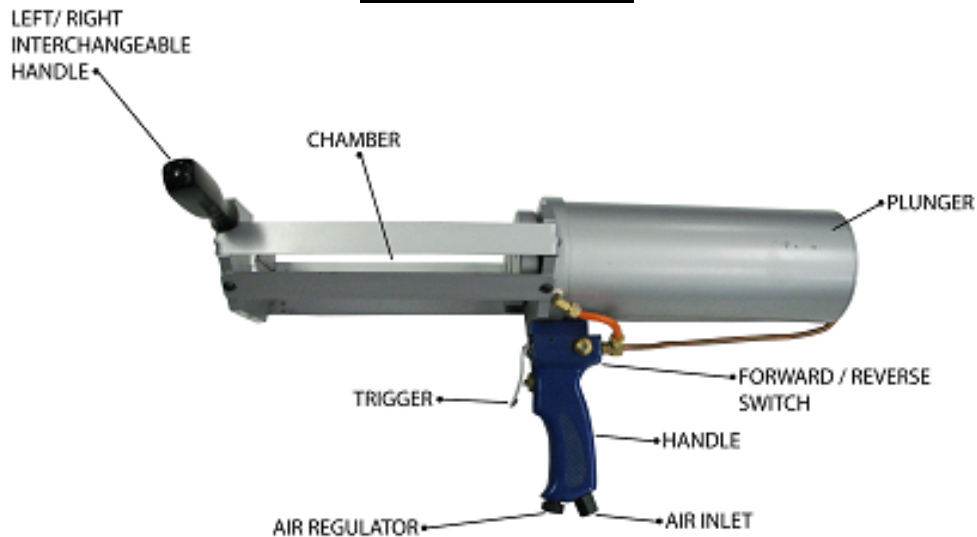

Customer Service

Chemque Inc.
266 Humberline Dr.,
Rexdale, Ontario M9W 5X1
Canada

T: +1- 416-679-5676
F: +1- 416-679-0511
sales@chemque.com
www.chemque.com

The conditions of your use and application of our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested method of application and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether they are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done at Chemque. All technical assistance and information provided with respect to Chemque's products is subject to Chemque's Terms and Conditions, including the limited warranty therein. Chemque's Terms and Conditions appear on the reverse side of Chemque's credit applications and invoices and are available upon your request. Except as expressly provided in the Terms and Conditions, Chemque excludes all express and implied warranties, representations, conditions and objections, whether statutory or otherwise, concerning the quality of the products of Chemque or their fitness for any particular purpose. It is expressly understood and agreed that the customer assumes and hereby expressly releases Chemque from all liability, in tort, contract, or otherwise, incurred in connection with the use of our products, technical assistance and information. Any statement or recommendation not contained herein is unauthorized and shall not bind Chemque. Nothing herein shall be construed as a recommendation to use any product in conflict with patents covering any material or its use. No license is implied or in fact granted under the claims of any patent.