

## Cable to Ground Rod

### Mold Information:


- Molds listed are for stranded cable. For solid conductor, add suffix "S" after conductor number. i.e. 4S = 4 AWG solid conductor.
- Molds listed are for tapered ground rods. For threaded sectional rods, add suffix "S" after the ground rod number. i.e. 5S8 = 5/8" sectional ground rod.
- Price Key is the **Bold Letter** in the Mold Part No.

### Required Tools & Accessories:

- MH1 - Handle for "K" Price Key Molds
- MH2 - Handle for "D" Price Key Molds

### Recommended Tools & Accessories:

- CCBRSH1 - Cable Cleaning Brush
- MCBRSH1 - Mold Cleaning Brush

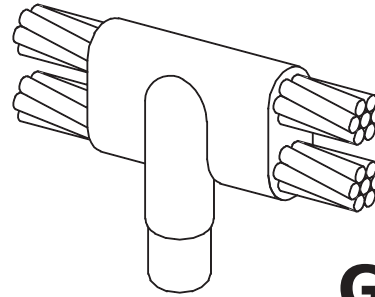

# GF

(Parallel Thru Horizontal Cables  
(Tap Over Run) to Top of  
Ground Rod)

### GF Connection Type

Ground Rod Size	Cable Size	Mold Part No.	Weld Metal	
			UltraShot	NUWTUBE
1/2"	#6	GF-126K	US90	NUWTUBE90
	#4	GF-124K	US115	NUWTUBE115
	#2 Sol	GF-122SK	US115	NUWTUBE115
	#2	GF-122K	US115	NUWTUBE115
	1/0	GF-121/OK	US150	NUWTUBE150
	2/0	GF-122/OK	US200	NUWTUBE200
	3/0	GF-123/OK	US250	NUWTUBE250
	4/0	GF-124/OK	US250	NUWTUBE250
5/8"	#6	GF-586K	US90	NUWTUBE90
	#4	GF-584K	US115	NUWTUBE115
	#2 Sol	GF-582SK	US150	NUWTUBE150
	#2	GF-582K	US150	NUWTUBE150
	1/0	GF-581/OK	US200	NUWTUBE200
	2/0	GF-582/OK	US250	NUWTUBE250
	3/0	GF-583/OD	US300	2-NUWTUBE150
	4/0	GF-584/OD	US300	2-NUWTUBE150
	250 MCM	GF-5825CMD	US400	2-NUWTUBE200
	300 MCM	GF-583CMD	US500	2-NUWTUBE250
350 MCM	GF-5835CMD	US500	2-NUWTUBE250	

### GF Connection Type continued

Ground Rod Size	Cable Size	Mold Part No.	Weld Metal	
			UltraShot	NUWTUBE
3/4"	#6	GF-346K	US90	NUWTUBE90
	#4	GF-344K	US115	NUWTUBE115
	#2 Sol	GF-342SK	US150	NUWTUBE150
	#2	GF-342K	US150	NUWTUBE150
	1/0	GF-341/OK	US200	NUWTUBE200
	2/0	GF-342/OK	US250	NUWTUBE250
	3/0	GF-343/OD	US300	2-NUWTUBE150
	4/0	GF-344/OD	US300	2-NUWTUBE150
	250 MCM	GF-3425CMD	US400	2-NUWTUBE200
	300 MCM	GF-343CMD	US500	2-NUWTUBE250
350 MCM	GF-3435CMD	US500	2-NUWTUBE250	
1"	#4	GF-104K	US150	NUWTUBE150
	#2	GF-102K	US200	NUWTUBE200
	1/0	GF-101/OK	US250	NUWTUBE250
	2/0	GF-102/OD	US300	2-NUWTUBE150
	3/0	GF-103/OD	US400	2-NUWTUBE200
	4/0	GF-104/OD	US400	2-NUWTUBE200
	250 MCM	GF-1025CMD	US500	2-NUWTUBE250

### NOTES:

- Molds listed are for copper-clad steel ground rods.
- For welding to full size stainless steel, galvanized steel or solid copper ground rods, add letter "F" to ground rod size. For sectional ground rods, add letter "S" to ground rod size. See chart on page 326 for details.